


Beacon LED - High Output

BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK
2059674



Produkteigenschaften

- Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 55° wide beam, optics: Aluminium reflector, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 2301lm, luminaire efficacy: 110lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

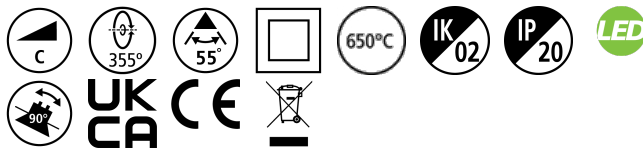



PRODUKTÜBERSICHT

Beam angle()	55
Produktbezeichnung	BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK
Technologie	LED
Gehäuse	Aluminium
Montage	Stromschienenmontage
Umgebung	Innenbereich
ETIM Klasse	EC001744
E-Nummer FI	4280830
E-Nummer SE	7401251
Leuchtenlichtstrom (lm)	2301
Systemeffizienz (lm/W)	110
Leuchtenbetriebswirkungsgrad (%)	100
Farbtemperatur (K)	4000
Lichtfarbe	Neutralweiß
Farbabweichung (SDCM)	3
Ausstrahlungswinkel (°)	55
Photometrische Risikogruppe	RG1
Systemleistung gesamt (W)	21
Spannung (V)	220-240V~
Elektrische Schutzklasse	Klasse II
Betriebsgerätetyp	Elektronischer Treiber
Dimmbar bis (%)	97
Gehäusefarbe	Schwarz
IP Schutzart	IP20
IK Schutzart	IK02
EAN-Nummer	5025768596744

PHOTOMETRIE

Beacon LED - High Output

BEACON 85CRI 4K WIDE BEAM L3 TRAILING EDGE BLACK
2059674

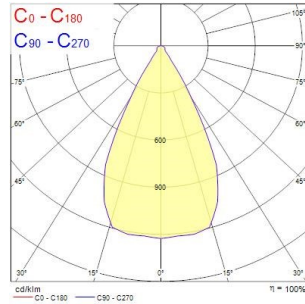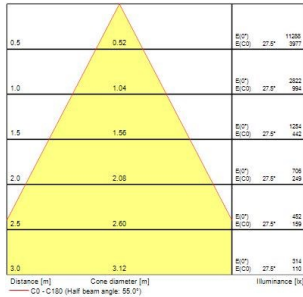

TECHNISCHE ZEICHNUNGEN

