

26681 ASTEN LED IP44 12W-NW

Wall-mounted LED light fitting, IP44


5905339266811













Kanlux ASTEN LED is a linear wall luminaire to be used in places with increased humidity (IP44). You can easily mount it above the bathroom mirror. The lamp has a built-in light source based on SMD LED diodes, which lifetime is at least 25,000 hours.

GENERAL DATA:

Colour: white / chrome

Place of assembly: wall mounted Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Compatible with a dimmer: no Replaceable light source: no Fixture lighting direction: down

Length [mm]: 600 Width [mm]: 110 Height [mm]: 41

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50/60 Maximum power [W]: 12

Class of protection against electric shock: ||

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [Im]: 770

Colour temperature: white

Colour temperature [K]: 4000

Colour uniformity [SDCM]: ≤6

Colour-rendering index Ra: ≥80

Service life [h]: 25000

Number of on/off cycles: ≥15000

Luminous efficiency of the lamp [lm/W]: 64

Ambient temperature range to which the product can be

exposed: 5÷30


Enclosure material: aluminum alloy **Connection type**: Bolt terminal block

Range of sections of wires used [mm 2]: 0,75 \div 1,5

The fixture set includes built-in LED's with the following

energy classes: A++,A+,ALamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: ≤ 0.5

IP class: 44









26681 ASTEN LED IP44 12W-NW

Wall-mounted LED light fitting, IP44



LOGISTIC DATA:

Unit of measurement: unit Packaging method: 20


Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 290 Grammage [g]: 502.5


Length of a unit pack [cm]: 13 Width of a unit pack [cm]: 5 Height of a unit pack [cm]: 61


Weight of a cardboard box [kg]: 10.05 Width of a cardboard box [cm]: 54 Height of a cardboard box [cm]: 27 Length of a cardboard box [cm]: 64 Volume of a cardboard box [m³]: 0.093312

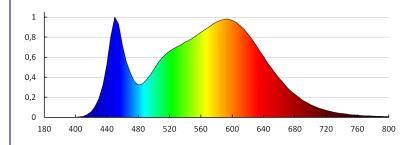

KANLUX S.A. (kat 26681) ASTEN LED IP44-12W-NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 26681) ASTEN LED IP44-12W-NW Lampy: 1 x ASTEN LED IP44-12W-NW





We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.

