





CHOOSE DURABILITY, QUALITY AND ENERGY SAVINGS

iQ-LED FL floodlights are part of Kanlux's iQ-LED line, which means that they combine the primary benefit of LED lighting technology – low energy use – and the highest quality components.

Introducing Premium iQ-LED Family products by Kanlux.









Kanlux iQ-LED FL

GUARANTEED DURABILITY AND ENERGY SAVINGS

Thanks to the use of high-quality components and automated production processes, the entire iQ-LED FL line is covered by a 5-year warranty (50,000h durability). IP 65 (IP 44 for the motion sensor version) protection ensures high resistance to ambient weather while the excellent lighting efficiency exceeding 120lm/W brings you increased energy savings. Featuring branded, high-quality LEDs, Kanlux's iQ-LED line guarantees top-of-the-line lighting parameters.




T20 m EFFICACY









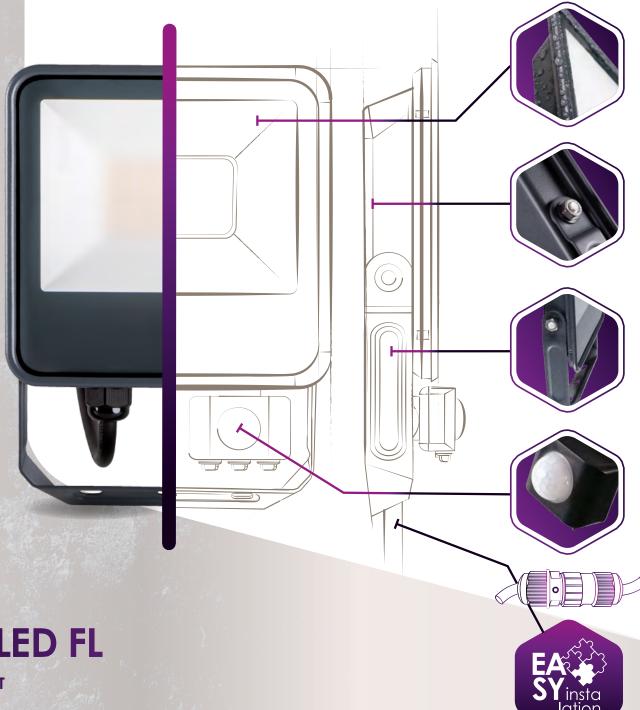

IP 65 (IP 44 for the motion sensor version) protection provides high resistance to ambient weather

The extruded aluminum housing sets new design trends and in conjunction with the automation of the production process, ensures optimal conditions of use

An ergonomic handle enables quick and easy installation with no need to remove it beforehand

> Motion sensor and non-motion sensor versions available

A hermetically sealed quick-connect coupling allows you to quickly and effortlessly connect the floodlight to the electric wire

Kanlux iQ-LED FL

TOP QUALITY FOR THE MOST DEMANDING CUSTOMERS.







Two enclosure variants

Kanlux iQ-LED FL... -SE

Kanlux iQ-LED FL





with a motion sensor

-10W - 20W - 30W - 50W -

without a motion sensor

- 10W - 20W - 30W - 50W - 90W -



WARRANTY

EFFICACY

Kanlux iQ-LED FL		(N)	[lm]	<u>lm</u> W	SENSOR
33880	IQ-LED FL-10W-NW	10W	1200lm	120lm/W	NONE
33881	IQ-LED FL-20W-NW	20W	2300lm	115lm/W	NONE
33882	IQ-LED FL-30W-NW	30W	3450lm	115lm/W	NONE
33883	IQ-LED FL-50W-NW	50W	6000lm	120lm/W	NONE
33884	IQ-LED FL-90W-NW	90W	10800lm	120lm/W	NONE
33885	IQ-LED FL-10W-NW-SE	10W	1200lm	120lm/W	PIR
33886	IQ-LED FL-20W-NW-SE	20W	2300lm	115lm/W	PIR
33887	IQ-LED FL-30W-NW-SE	30W	3450lm	115lm/W	PIR
33888	IQ-LED FL-50W-NW-SE	50W	6000lm	120lm/W	PIR

Colour temperature: 4000K Rated voltage[V]: 220-240 AC

IEC protection class: I Durability: 50 000 h

Number of on/off cycles: ≥ 25,000


Housing material: steel

Protective glass material: tempered glass

Housing colour: dark grey Wire length: 30 cm

EXTRA ACCESSORY: IQ-LED FL QC I 3x1MM2 /33889/ Hermetically-sealed quick-connect coupling, enabling quick and easy connection of the wire and the floodlight.





IQ-LED FL-10W-NW: 109x92x27mm IQ-LED FL-20W-NW: 164x135x30mm IQ-LED FL-30W-NW: 186x135x30mm IQ-LED FL-50W-NW: 240x180x30mm IQ-LED FL-90W-NW: 314x243x38



IQ-LED FL-10W-NW-SE: 164x135x56mm IQ-LED FL-20W-NW-SE: 164x135x56mm IQ-LED FL-30W-NW-SE: 186x135x56mm IQ-LED FL-50W-NW-SE: 240x180x56mm





Kanlux iQ-LED FL



securely packed