


Kanlux






**NEW TRACK LIGHT
LUMINARIES**

Kanlux BTL/BTLW

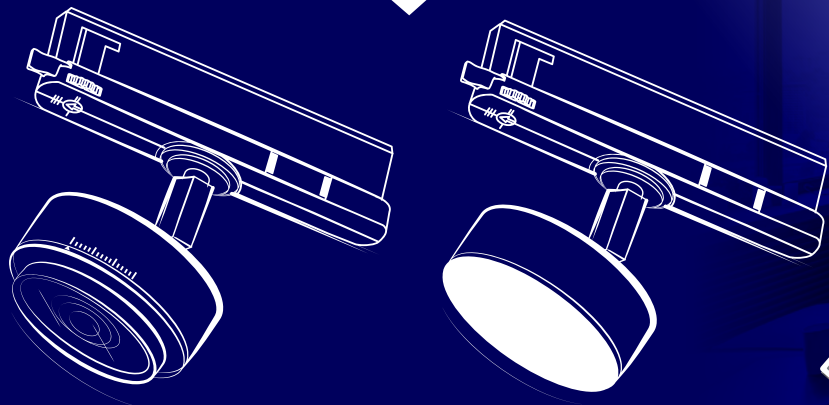

Kanlux

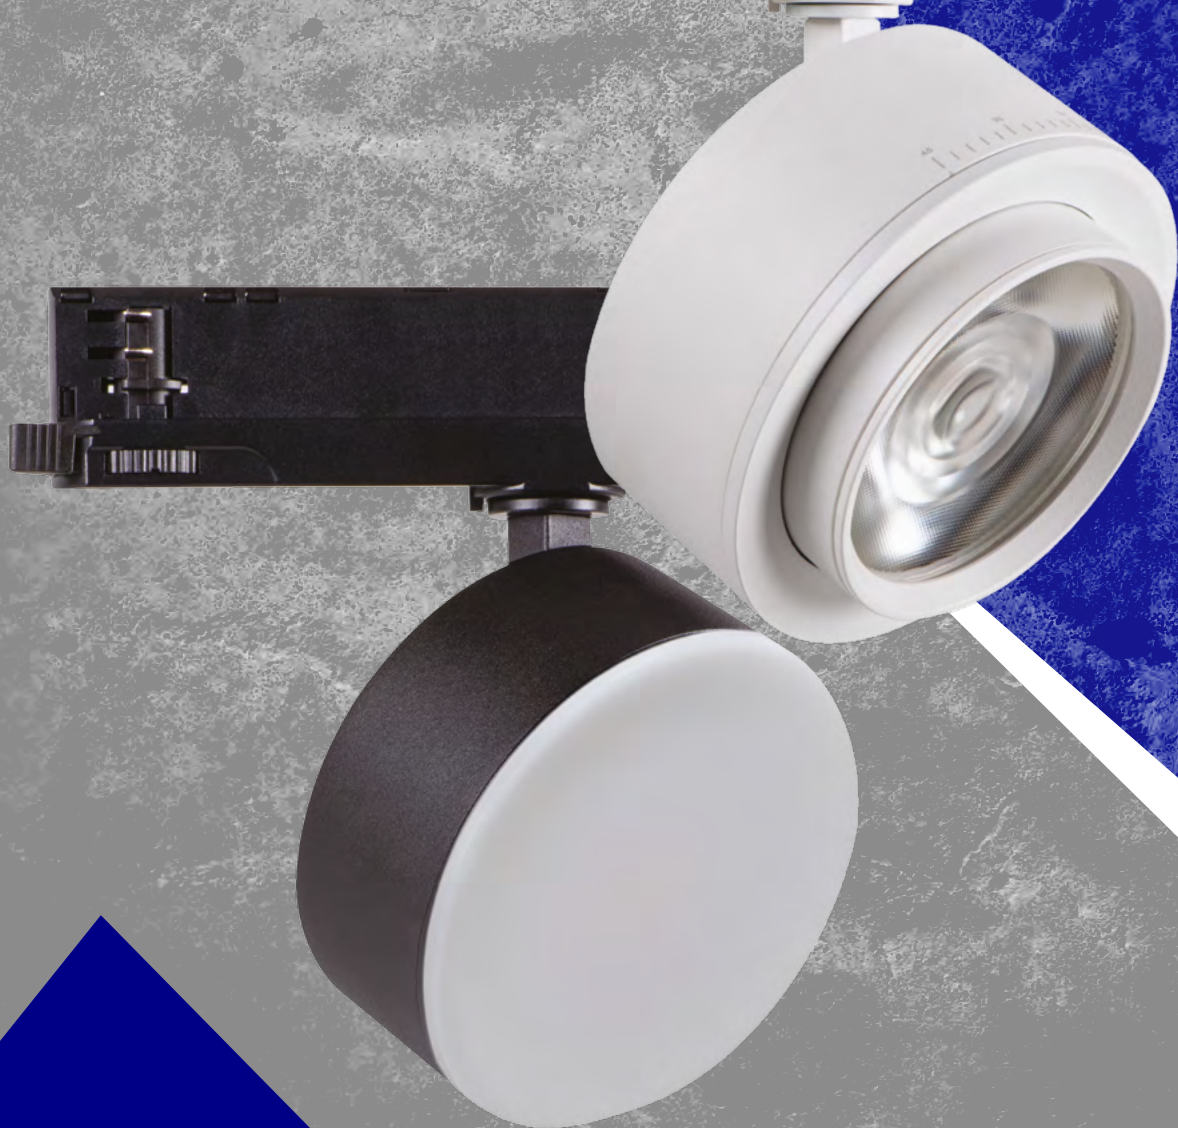

Kanlux BTL/BTLW

New design:

- ✓ adapted to most 3-circuit rails, including the Kanlux TEAR system equipped with a power supply integrated with the adapter

Kanlux



Kanlux BTL/BTLW

The Kanlux BTL series of luminaires has a high colour rendering index

CRI>90


Kanlux

LAB



Ra90+
true colors

Kanlux

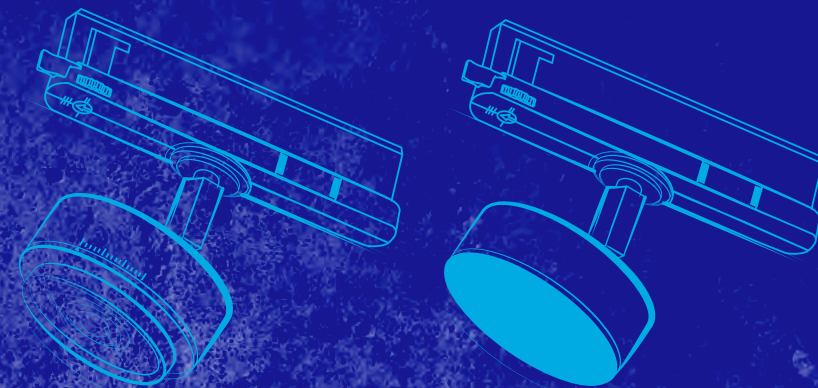

Kanlux BTL/BTLW

High quality confirmed
by a 5-year warranty.

Kanlux

LAB



* 5-YEAR WARRANTY ON THE TERMS
AND CONDITIONS OF THE WARRANTY
STATEMENT AVAILABLE ON
THE KANLUX WEBSITE

Kanlux

Kanlux BTL

Luminaries in the directional version with a lens and lighting angle adjustment in the range



from 15° to 45°

Optionally, a component can be used - a barrier with a

honeycomb structure

that reduces glare

(added to each BTL luminaire with adjustable angle)

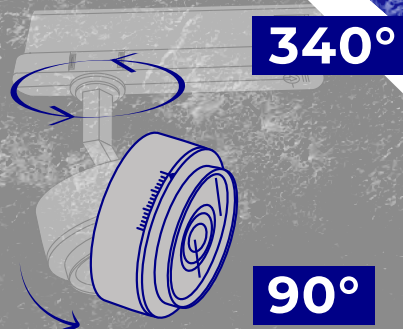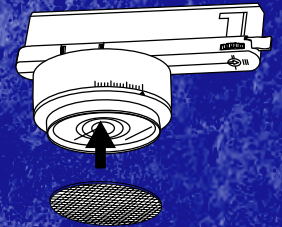

Kanlux

Kanlux BTL

Three power solutions:

18W 28W 38W

The most popular housing colours:

white W black B

Two colours of light:

4000K NW
3000K WW



Kanlux


Kanlux BTLW

Luminaries with a opal diffuser, providing a wide viewing angle of **120°**


Available in power: **18W**

Housing colours: **white W black B**


Two colors of light:
4000K NW 3000K WW

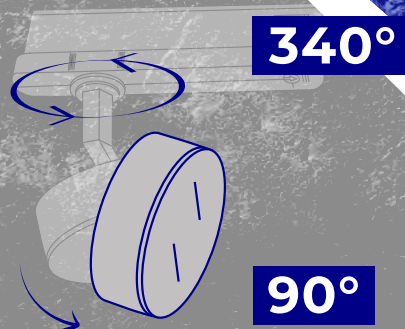


◀ They are perfect for home conditions, as general lighting and wherever a wide lighting angle of the luminary is needed.

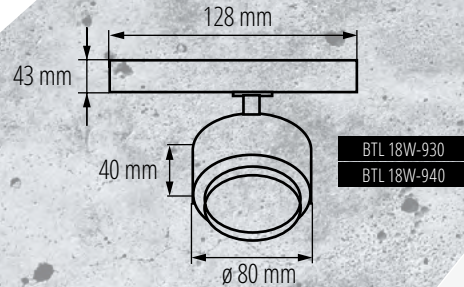


BTL 18W-930
BTL 18W-940

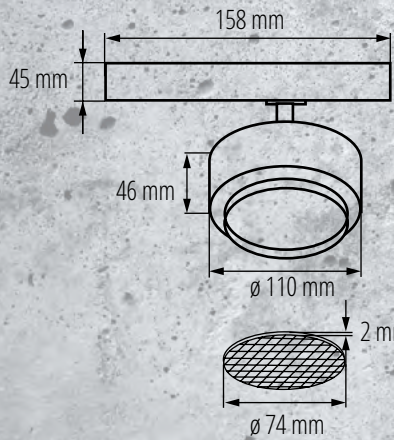

BTL 28W-930
BTL 28W-940

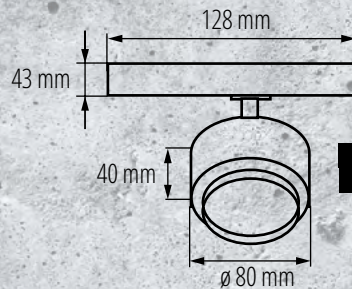

BTLW 18W-930
BTLW 18W-940

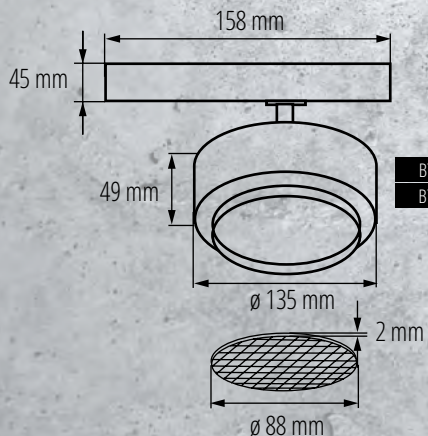

BTL 38W-930
BTL 38W-940

Kanlux BTL/BTLW



MAX. [lm]



●	BTL 18W-930-B	35651	18W	1750lm	3000K
○	BTL 18W-930-W	35650	18W	1800lm	3000K
●	BTL 18W-940-B	35653	18W	1750lm	4000K
○	BTL 18W-940-W	35652	18W	1800lm	4000K
●	BTL 28W-930-B	35655	28W	2800lm	3000K
○	BTL 28W-930-W	35654	28W	3000lm	3000K
●	BTL 28W-940-B	35657	28W	2800lm	4000K
○	BTL 28W-940-W	35656	28W	3000lm	4000K
●	BTL 38W-930-B	35659	38W	3800lm	3000K
○	BTL 38W-930-W	35658	38W	4000lm	3000K
●	BTL 38W-940-B	35661	38W	3800lm	4000K
○	BTL 38W-940-W	35660	38W	4000lm	4000K
●	BTLW 18W-930-B	35663	18W	1400lm	3000K
○	BTLW 18W-930-W	35662	18W	1450lm	3000K
●	BTLW 18W-940-B	35665	18W	1400lm	4000K
○	BTLW 18W-940-W	35664	18W	1450lm	4000K

up to
107 $\frac{\text{lm}}{\text{W}}$
15°- 45°

up to
80 $\frac{\text{lm}}{\text{W}}$
120°

rated voltage: **220-240 V**
light source: **LED COB**
regulacja kąta: **90° / 340°**
angle adjustment: **aluminum alloy**
protection class: **II**
IP 20



* 5-YEAR WARRANTY ON THE TERMS AND CONDITIONS OF THE WARRANTY STATEMENT AVAILABLE ON THE KANLUX WEBSITE

Kanlux



Kanlux BTL/BTLW

Reliable in any private and commercial interior: pharmacies, drug stores, boutiques, clothing and jewelry stores, shopping centers, hotels.

Kanlux



Kanlux BTL/BTLW
well
packed

kanlux.com