


# ***Kanlux***

**NEW FORMAT  
OF HIGH BAY  
FITTINGS**

**Kanlux  
HB PRO  
STRONG**

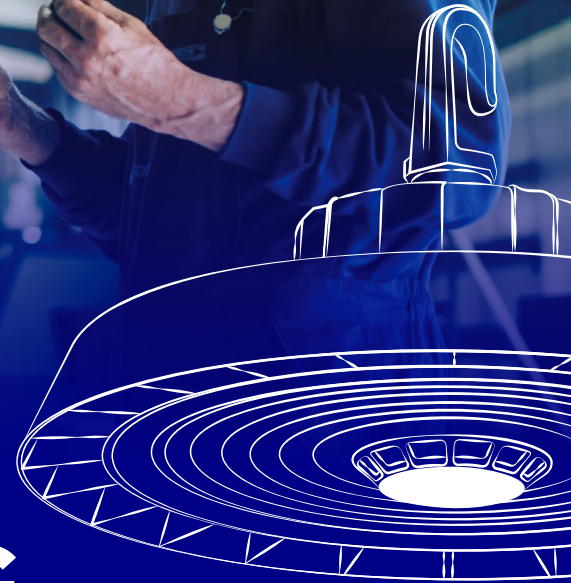

# Kanlux

The icon consists of a square border containing a stylized water droplet above the text 'IP' and '65' stacked vertically.

IP  
65

## Kanlux HB PRO STRONG

The modern design effectively limits the possibility of overheating of the luminaire and provides a **high IP65 rating**.

The icon consists of a square border containing a hammer striking a nail above the text '10' and 'IK' stacked vertically.

10  
IK

The IK 10 degree is achieved by using a protective grid (without grid IK08).



**Kanlux**

## **Kanlux HB PRO STRONG**

up to  
**170**  
lm/W

**High luminous efficiency,**  
up to 170lm/W.



**Quality**  
confirmed by  
a 5-Year warranty.


# Kanlux

## **Kanlux HB PRO STRONG**

**SWITCH POWER**  
**adjustable 100/75/50%.**

### **1-10V DIM power supply**

The power supply installed in HB PRO STRONG works with dimmers operating in the 1-10V DC interface standard. This allows for smooth adjustment of light intensity.

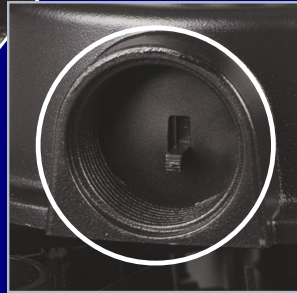


## Kanlux HB PRO STRONG

Kanlux HB PRO STRONG Wide range of accessories: wall and ceiling mount, protective nets and optical systems that change the lighting angle of the luminary - 60° and 120°.


### HBPHS BRACKET

— 38137 —

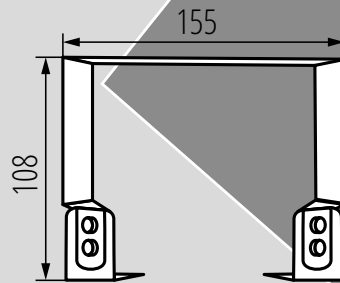


### HBPHS LENS 150W 120D

— 38139 —

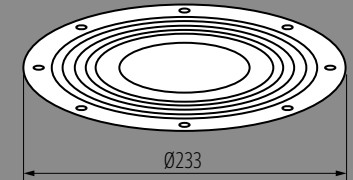


### HBPHS LENS 150W 60D

— 38138 —

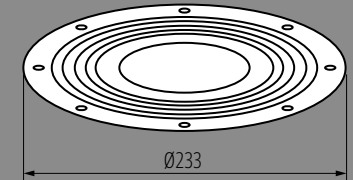


### HBPHS GRID 150W

— 38135 —




### HBPHS LENS 200W 120D

— 38129 —

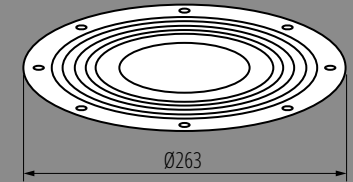


### HBPHS GRID 200W

— 38136 —



### HBPHS LENS 200W 60D

— 38128 —

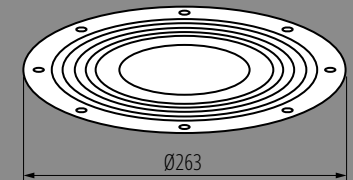



# Kanlux

**Kanlux HB PRO STRONG**  
Fixture application:  
**industrial facilities,  
warehouses and production  
halls, factories.**

# Kanlux

## Kanlux HB PRO STRONG



<b>27158</b>	HB PRO STRONG 150W-NW	150W 112,5W 75W	<b>25 500lm</b> <b>19 125lm</b> <b>12 750lm</b>	90°
<b>27159</b>	HB PRO STRONG 200W-NW	200W 150W 100W	<b>34 000lm</b> <b>25 500lm</b> <b>17 000lm</b>	90°
<b>38137</b>	HBPHS BRACKET	Mounting bracket for HB PRO STRONG		
<b>38135</b>	HBPHS GRID 150W	Protective grid for HB PRO STRONG 150W		
<b>38136</b>	HBPHS GRID 200W	Protective grid for HB PRO STRONG 200W		
<b>38139</b>	HBPHS LENS 150W 120D	Lens for HB PRO STRONG 150W		
<b>38138</b>	HBPHS LENS 150W 60D	Lens for HB PRO STRONG 150W		
<b>38129</b>	HBPHS LENS 200W 120D	Lens for HB PRO STRONG 200W		
<b>38128</b>	HBPHS LENS 200W 60D	Lens for HB PRO STRONG 200W		

Rated voltage: 220-240 A

Choosing material and color: aluminum alloy, black  
protective glass material: polycarbonate (PC)


light color: white /4000K/

durability of the light source: 50,000h


\* THE IK10 RATE IS OBTAINED BY USING  
A PROTECTIVE GRID



5 YEAR WARRANTY UNDER THE TERMS OF THE WARRANTY STATEMENT AVAILABLE ON THE WEBSITE



HB PRO STRONG 150W-NW



HB PRO STRONG 200W-NW