



Embedded louver fitting

5905339257130



Kanlux REGIS are raster recessed luminaires that can be mounted quickly and easily with spring clips and quick couplings. Raster lighting is still a very popular solution for office and industrial spaces.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Stabiliser/lamp start: warm

Replaceable light source: yes

The product is not suitable to be covered with a heat-insulating material: yes

Light source included: no

Length [mm]: 610

Width [mm]: 595

Height [mm]: 78

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50/60

Maximum power [W]: 4 x 18

Class of protection against electric shock: I

Lampshade material: PMMA

Light source: T8

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B

Enclosure material: steel

Reflector material: aluminum alloy

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1÷2,5

Stabiliser type: EVG

Stabiliser energy class: A2

IP class: 40

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 3022

Embedded louver fitting



Grammage [g]: 3624

Length of a unit pack [cm]: 65

Width of a unit pack [cm]: 62.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 3.624

Width of a cardboard box [cm]: 63

Height of a cardboard box [cm]: 8.8

Length of a cardboard box [cm]: 65.5


Volume of a cardboard box [m³]: 0.036313

ADDITIONAL INFORMATION:

- reflector in the shape of a half-parabola / raster crossbars in the shape of "V" / sockets of fluorescent lamps masked with a reflector (exception: version REGIS 3 OPAL, REGIS 3WS OPAL with an opal board)
- the casing contains openings facilitating straight through type power supply
- protective cable on a raster, additionally securing against electric shock, except the version: REGIS 3 OPAL, REGIS 3WS OPAL.
- simple assembly of the raster on spring catches
- quick coupling, for connection of power supply, facilitates and accelerates assembly, stabilizer by OSRAM in A2 class
- powder coating
- REGIS 3WS equipped with a stabilizer with "warm start".

KANLUX S.A. (kat 25713) REGIS 3WS OPAL 418 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25713) REGIS 3WS OPAL 418
Lampy: 4 x T26 18W/827

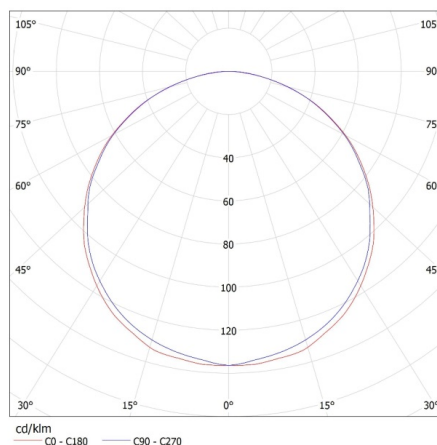

25713 REGIS 3WS OPAL 418 PT

Embedded louver fitting

ACCESSORIES:

72333 CLP-REGIS/PT

CLP-REGIS/PT mounting support, used for building in fittings in a plasterboard suspended ceiling. 4 pcs. in a set.

