

LED light source

5905339330819

C driver











LED light sources Kanlux REMI LED are designed for small-size luminaires. Their illumination angle is 120^o. The bulb is distinguished by its small size so it will be will be useful for neat, small lamps.

GENERAL DATA:

Colour: white Compatible with a dimmer: no Height [mm]: 46 Diameter [mm]: 35 Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Lamp-power factor: 0.4 Rated power [W]: 2,2 Material: plastic Light source: PAR11 Diode type: LED SMD Total rated luminous flux [lm]: 180 Colour temperature: Warm white Colour temperature [K]: 3000 **Colour uniformity [SDCM]**: ≤ 6 **Colour-rendering index Ra**: ≥80 **Cap**: GU10 Rated lamp-service life [h]: 15000 Number of on/off cycles: ≥ 15000 Rated beam angle [°]: 120 Rated light level [°]: 120 Light source EEI: A++ Lamp rated current [mA]: 20 Annual power consumption [kWh/1000h]: 2 Ignition time [s]: $\leq 0,5$ Lamp-heating time to 60% of the full luminous flux [s]: Negligible Lamp-heating time to 95% [s]: <2 Lamp premature-failure indicator: <5% po 1000h Lamp service life factor after the period of 6000h [%]: ≥90 Luminous flux retention factor at the end of rated **service life [%]**: ≥70 Luminous flux retention factor after the period of 6000h **[%]**: ≥80 Rated useful luminous flux [Im]: 150






LED light source

Rated peak light intensity [cd]: 75 Light source shape: spot

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 10 Number of units in the secondary packaging: 10 Number of units in the packaging: 100 Net unit weight [g]: 18 Grammage [g]: 36.6 Length of a unit pack [cm]: 8.5 Width of a unit pack [cm]: 10.5 Weight of a unit pack [cm]: 10.5 Weight of a cardboard box [kg]: 3.66 Width of a cardboard box [kg]: 3.66 Width of a cardboard box [cm]: 24 Length of a cardboard box [cm]: 47 Volume of a cardboard box [m³]: 0.03384

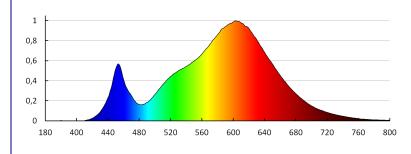

KANLUX S.A. (kat 33081) REMI LED GU10-WW / LDC (Polar)

