


22430 DALLA CT-DTO50-W

Ceiling-mounted spotlight fitting

5905339224309

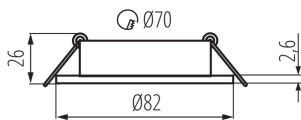

Kanlux DALLA is a very carefully made holder for installation inside. It has a movable ring, thanks to which you can adjust the light stream. Its shapes and universal colours allow achieving a modern, discrete effect of elegance.

GENERAL DATA:

Colour: white

Necessity of using self-shielding lamps: yes

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Replaceable light source: yes

The product is not suitable to be installed on a normally flammable surface: >35W

The product is not suitable to be covered with a heat-insulating material: yes

Light source included: no

Height [mm]: 26

Diameter [mm]: 82

Assembly hole [mm]: Ø70

Wire length [m]: 0.12

TECHNICAL DATA:

Rated voltage [V]: 12 AC; 12 DC

Maximum power [W]: max 50

Class of protection against electric shock: III

Light source: MR16

Cap: Gx5,3

Ambient temperature range to which the product can be exposed: 5÷25

The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B,C,D,E

Enclosure material: aluminum alloy

Connection type: Free cable ends

Wire diameter [mm²]: 0.75

Lighting-fixture angle regulation: in one axis

Lighting-fixture angle regulation [°]: 30

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 50


Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 76

22430 DALLA CT-DTO50-W

Ceiling-mounted spotlight fitting

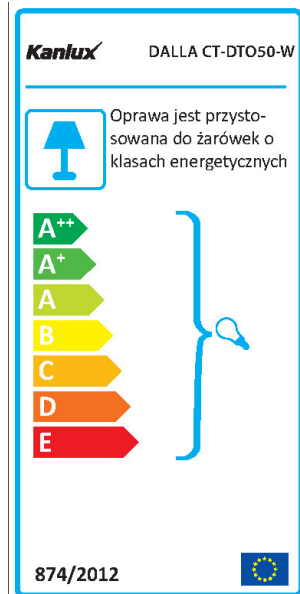

Grammage [g]: 104.4

Length of a unit pack [cm]: 8.5

Width of a unit pack [cm]: 4

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 5.22

Width of a cardboard box [cm]: 22

Height of a cardboard box [cm]: 19

Length of a cardboard box [cm]: 45

Volume of a cardboard box [m³]: 0.01881

