



Ceiling-mounted spotlight fitting

5905339025548

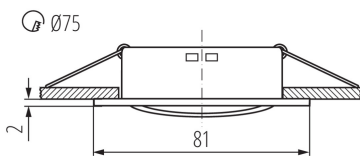

Kanlux NAVI is a family of simple in their form, diverse spot-beam holders with very broad possibilities of use.

### GENERAL DATA:

**Colour:** matt brass

**Necessity of using self-shielding lamps:** yes

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Replaceable light source:** yes

**The product is not suitable to be installed on a normally flammable surface:** >35W

**The product is not suitable to be covered with a heat-insulating material:** yes

**Light source included:** no

**Height [mm]:** 21

**Diameter [mm]:** 81

**Assembly hole [mm]:** Ø75

**Wire length [m]:** 0.12

### TECHNICAL DATA:

**Rated voltage [V]:** 12 AC; 12 DC

**Maximum power [W]:** max 50

**Class of protection against electric shock:** III

**Light source:** MR16

**Cap:** Gx5,3

**Ambient temperature range to which the product can be exposed:** 5÷25

**The fixture is adapted to the light sources of the following energy classes:** A++,A+,A,B,C,D,E

**Enclosure material:** aluminum alloy

**Connection type:** Free cable ends

**Wire diameter [mm<sup>2</sup>]:** 0.75

**Lighting-fixture angle regulation:** in one axis

**Lighting-fixture angle regulation [°]:** 15

**IP class:** 20

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 50

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 50


**Net unit weight [g]:** 74

**Grammage [g]:** 110

**Length of a unit pack [cm]:** 10

## 02554 NAVI CTX-DT10-AB

Ceiling-mounted spotlight fitting

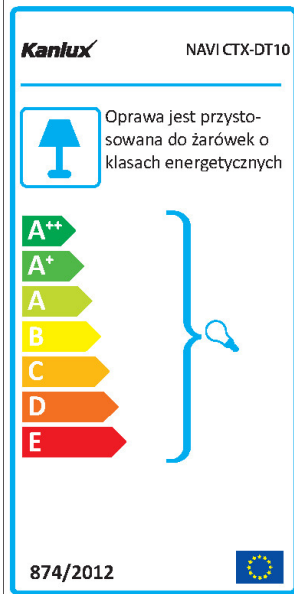

**Width of a unit pack [cm]:** 4  
**Height of a unit pack [cm]:** 10  
**Weight of a cardboard box [kg]:** 5.5  
**Width of a cardboard box [cm]:** 22  
**Height of a cardboard box [cm]:** 22.5  
**Length of a cardboard box [cm] :** 52  
**Volume of a cardboard box [m<sup>3</sup>]:** 0.02574

