



28990 REKA LED EL 7W-L-GR

Facade luminaire

5905339289902

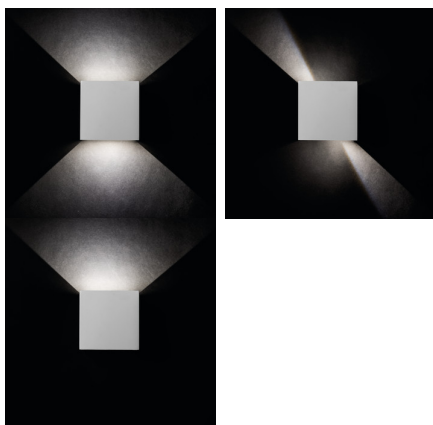

A visually interesting light effect, which we create by adjusting the angle of the light beam, is the basic advantage of Kanlux REKA LED. With the masking flaps, we can change the angle of illumination by ourselves - at the top and bottom of the luminaire. Kanlux REKA LED can be used to light interiors, as well as building facades due to its IP54 tightness.

GENERAL DATA:

Colour: graphite
Place of assembly: wall mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Wykrywanie ruchu: no
Replaceable light source: no
Fixture lighting direction: up and down
Length [mm]: 100
Width [mm]: 100
Height [mm]: 100
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50/60
Maximum power [W]: 7
Class of protection against electric shock: I
Diode type: LED COB
Luminous flux [lm]: max 360
Colour temperature: white
Colour temperature [K]: 4000
Colour uniformity [SDCM]: ≤6
Colour-rendering index Ra: ≥80
Service life [h]: 30000
Number of on/off cycles: ≥20000
Lighting angle [°]: max 90
Ambient temperature range to which the product can be exposed: -15÷35
Enclosure material: aluminum alloy
Connection type: Bolt terminal block
Range of sections of wires used [mm²]: 1
The fixture set includes built-in LED's with the following energy classes: A++,A+,A
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
IP class: 54

Facade luminaire




LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 20
Number of units in the secondary packaging: 1
Number of units in the packaging: 20
Net unit weight [g]: 560
Grammage [g]: 642
Length of a unit pack [cm]: 11
Width of a unit pack [cm]: 11
Height of a unit pack [cm]: 11
Weight of a cardboard box [kg]: 12.84
Width of a cardboard box [cm]: 23.5
Height of a cardboard box [cm]: 28
Length of a cardboard box [cm]: 57
Volume of a cardboard box [m³]: 0.037506

ADDITIONAL INFORMATION:

- Beam-angle adjustment

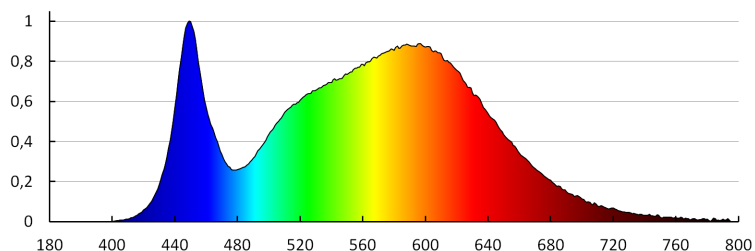

KANLUX S.A. (kat 28990) REKA LED EL 7W-L-GR / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28990) REKA LED EL 7W-L-GR
Lamps: 1 x REKA LED EL 7W-L-GR

