


Facade luminaire

5905339070807

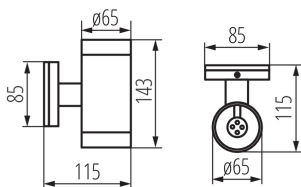

Kanlux BART EL is a façade luminaire which perfectly blends into a modern building and constructions of a more classic style. The rating of tightness (IP54) of Kanlux BART EL luminaire ensures resistance to weather conditions.

### GENERAL DATA:

**Colour:** grey  
**Place of assembly:** wall mounted  
**Place of application:** Indoors and outdoors  
**Minimum distance from the illuminated object:** 0,5m  
**Replaceable light source:** yes  
**Light source included:** no  
**Fixture lighting direction:** up and down  
**Length [mm]:** 85  
**Width [mm]:** 115  
**Height [mm]:** 143


### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50/60  
**Maximum power [W]:** 2 x max 35  
**Class of protection against electric shock:** I  
**Light source:** PAR16  
**Cap:** GU10  
**Ambient temperature range to which the product can be exposed:** -20÷35  
**The fixture is adapted to the light sources of the following energy classes:** A++,A+,A,B,C,D,E  
**Enclosure material:** aluminum alloy  
**Protective glass material:** Tempered glass  
**Connection type:** Bolt terminal block  
**Range of sections of wires used [mm²]:** 1÷2,5  
**IP class:** 54

### LOGISTIC DATA:

**Unit of measurement:** unit  
**Packaging method:** 18  
**Number of units in the packaging:** 18  
**Net unit weight [g]:** 510  
**Grammage [g]:** 605.56  
**Length of a unit pack [cm]:** 12.5  
**Width of a unit pack [cm]:** 9  
**Height of a unit pack [cm]:** 15.5  
**Weight of a cardboard box [kg]:** 10.90008  
**Width of a cardboard box [cm]:** 29

### Facade luminaire

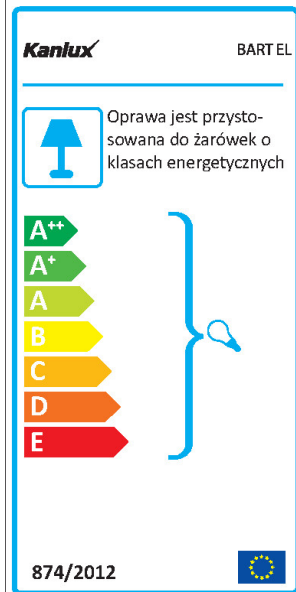

**Height of a cardboard box [cm]:** 39  
**Length of a cardboard box [cm] :** 32  
**Volume of a cardboard box [m³]:** 0.036192

