


LED spotlight fitting, IP44

5905339257819











Kanlux IVIAN LED is a family of downlight type holders. It is characterized by an increased degree of tightness - IP44, which allows using it in bathrooms and rooms with increased humidity. LED SMD diodes are the light source and the casing is made of plastic.

GENERAL DATA:

Colour: nickel satin Place of assembly: Recessed mount in the ceiling Place of application: Indoors Minimum distance from the illuminated object: 0,5m Compatible with a dimmer: no Replaceable light source: no The product is not suitable to be covered with a heatinsulating material: yes Height [mm]: 55 Diameter [mm]: 83 Assembly hole [mm]: Ø65 Integrated LED light source: yes

TECHNICAL DATA:


Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50/60 Maximum power [W]: 4,5 Class of protection against electric shock: II Lampshade material: plastic Diode type: LED SMD Luminous flux [lm]: 340 **Colour temperature**: Warm white Colour temperature [K]: 3000 **Colour uniformity [SDCM]**: ≤ 6 **Colour-rendering index Ra**: ≥80 Service life [h]: 15000 Number of on/off cycles: ≥25000 Lighting angle [°]: 100 Ambient temperature range to which the product can be exposed: 5÷25 Enclosure material: plastic Connection type: Terminal block The fixture set includes built-in LED's with the following energy classes: A++,A+,A Lamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: ≤0,5 IP class: 44





25781 IVIAN LED 4,5W SN-WW


LED spotlight fitting, IP44





LOGISTIC DATA:

Unit of measurement: unit Packaging method: 50 Number of units in the secondary packaging: 1 Number of units in the packaging: 50 Net unit weight [g]: 78 Grammage [g]: 145.2 Length of a unit pack [cm]: 11.5 Width of a unit pack [cm]: 9.5 Height of a unit pack [cm]: 7.5 Weight of a cardboard box [kg]: 7.26 Width of a cardboard box [cm]: 24 Height of a cardboard box [cm]: 40.5 Length of a cardboard box [cm]: 49 Volume of a cardboard box [m³]: 0.047628

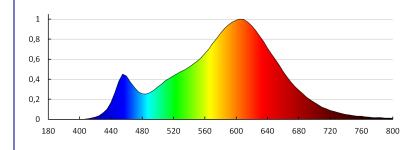

KANLUX S.A. (kat 25781) IVIAN LED 4,5W SN-WW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25781) IVIAN LED 4,5W SN-WW Lampy: 1 x IVIAN LED 4_5W SN-WW

