


Wall & ceiling lighting fitting

5905339291257

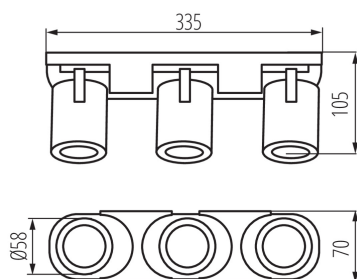

Kanlux LAURIN spotlights provide a very large selection of directional ceiling and wall lamps. The simple and minimalist design can be successfully used in many rooms in the house. Free adjustment of the luminous flux direction is an additional advantage of these fixtures.

GENERAL DATA:

Colour: black

Place of assembly: do nadbudowania na ścianie|do nadbudowania na suficie

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Replaceable light source: yes

Light source included: no

Length [mm]: 335

Width [mm]: 70

Height [mm]: 108

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50/60

Maximum power [W]: 3 x max 35

Class of protection against electric shock: I

Light source: PAR16

Cap: GU10

Ambient temperature range to which the product can be exposed: 5÷25

The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B,C,D,E

Enclosure material: aluminum alloy

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1÷2,5

The fixture is movable horizontally [°]: 310

The fixture is movable vertically [°]: 90

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 10

Number of units in the secondary packaging: 1

Number of units in the packaging: 10


Net unit weight [g]: 810

Grammage [g]: 934

Length of a unit pack [cm]: 11.5

Width of a unit pack [cm]: 7.5

Wall & ceiling lighting fitting

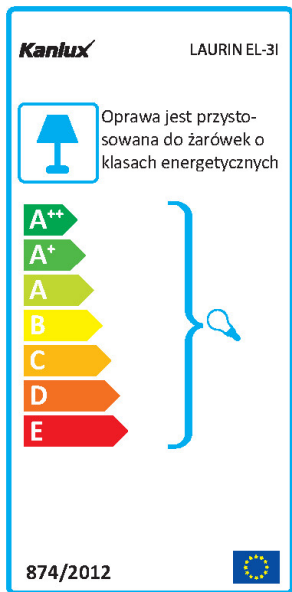

Height of a unit pack [cm]: 35.5

Weight of a cardboard box [kg]: 9.34

Width of a cardboard box [cm]: 24

Height of a cardboard box [cm]: 37.5

Length of a cardboard box [cm] : 39.5

Volume of a cardboard box [m³]: 0.03555

