


Ducted fan

8594056490103

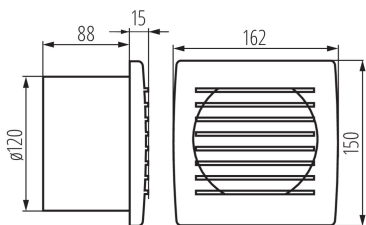

Kanlux CYKLON EOL series of fans is available in three sizes with diameter of 100, 120 and 150mm. They are made of plastic, in white colour. Their power is 19, 20 and 22W respectively. The number of rotations from each size comes to 2550/min.

GENERAL DATA:

Colour: white
Place of assembly: Recessed mount in the wall
Place of application: Indoors
Time switch: yes
Length [mm]: 162
Width [mm]: 103
Height [mm]: 150
Assembly hole [mm]: Ø120

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50/60
Maximum power [W]: 20
Class of protection against electric shock: II
Engine rotation: 2550
Bearing type: sliding
Connection type: Terminal block
Range of sections of wires used [mm²]: 1
Sound pressure [dB]: 38
Air-flow volume rate [m³/h]: 150
Motor-power consumption [W]: 20
IP class: X4
Protection class: II

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 12
Number of units in the packaging: 12
Net unit weight [g]: 530
Grammage [g]: 579.17
Length of a unit pack [cm]: 16
Width of a unit pack [cm]: 10.5
Height of a unit pack [cm]: 17
Weight of a cardboard box [kg]: 6.95004
Width of a cardboard box [cm]: 32.5
Height of a cardboard box [cm]: 32.5
Length of a cardboard box [cm]: 35
Volume of a cardboard box [m³]: 0.036969

Ducted fan

ADDITIONAL INFORMATION:

- Rotation speed: 2550/min
- Efficiency 150m³/h
- Noise level 38dB (A)
- CYKLON EOL120HT, additionally equipped with a moisture sensor which allows the fan to activate after reaching a pre-set moisture threshold