

28868 FTHL1500 73W-840-INT

LED dustproof lighting fitting

5905339288684


















GENERAL DATA:

Colour: grey

Place of assembly: ceiling mounted, wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated obj

Minimum distance from the illuminated object: 0,5m Possibility of fixture-loop-through connection: yes Compatible with a dimmer: DALI

Replaceable light source: no Length [mm]: 1480

Width [mm]: 80 Height [mm]: 70

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50/60 Maximum power [W]: 73

Class of protection against electric shock: I

Lampshade material: PC
Diode type: LED SMD
Luminous flux [Im]: 9800
Colour temperature: white
Colour temperature [K]: 4000
Colour uniformity [SDCM]: ≤3
Colour-rendering index Ra: ≥80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated

service life: L90B10

Number of on/off cycles: ≥30000 Lighting angle [°]: X70/Y95

Luminous efficiency of the lamp [lm/W]: 134

Ambient temperature range to which the product can be

exposed: -25÷35

Shade type: prismatic, narrow-beam

Enclosure material: PC

Connection type: Self-clamping block

Range of sections of wires used [mm 2]: $0.5 \div 2.5$

The fixture set includes built-in LED's with the following

energy classes: A++,A+,ALamp-heating time [s]: ≤ 1 Lamp-ignition time [s]: ≤ 0.5

Maximum number of loop-through-connected fixtures: 7

IK class: 08 IP class: 65

LOGISTIC DATA:





28868 FTHL1500 73W-840-INT

LED dustproof lighting fitting

Unit of measurement: unit Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1


Net unit weight [g]: 2620 Grammage [g]: 2850

Length of a unit pack [cm]: 150 Width of a unit pack [cm]: 8 Height of a unit pack [cm]: 7

Weight of a cardboard box [kg]: 2.85
Width of a cardboard box [cm]: 9
Height of a cardboard box [cm]: 7.5
Length of a cardboard box [cm]: 150
Volume of a cardboard box [m³]: 0.010125

ADDITIONAL INFORMATION:

• 5 years Warranty under the terms of the warranty statement, available on our website

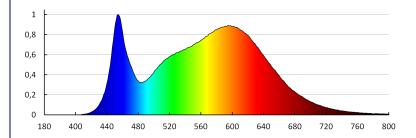

KANLUX S.A. (kat 28868) FTHL1500 73W-840-INT / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28868) FTHL1500 73W-840-INT Lamps: 1 x FTHL1500 73W-840-INT

