


27251 KMI-3/25A

Modular switch disconnecter

5905339272515

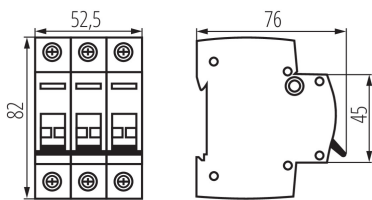

Switch disconnecter is used to disconnect circuits loaded with rated current.

GENERAL DATA:

Utilisation category: AC-22A

Place of application: Indoors

Norm: PN-EN 60947-3

Length [mm]: 76

Width [mm]: 52.5

Height [mm]: 82

TECHNICAL DATA:

Rated voltage [V]: 230/400 AC

Rated current [A]: 25

Rated frequency [Hz]: 50/60

Ambient temperature range to which the product can be exposed: -25÷45

Range of sections of wires used [mm²]: 1÷50

Number of modules: 3

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 4

Number of units in the secondary packaging: 4

Number of units in the packaging: 40

Net unit weight [g]: 244

Grammage [g]: 270

Length of a unit pack [cm]: 5.5

Width of a unit pack [cm]: 7.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 10.8

Width of a cardboard box [cm]: 24.5

Height of a cardboard box [cm]: 20

Length of a cardboard box [cm]: 46

Volume of a cardboard box [m³]: 0.02254